XMP-6200

Hardware User Manual

Contents

1. Introduction 1

1.1. Package contents 1

1.2. Installation 1

1.3. Physical view 2

2. Technical Data 3

2.1. Specifications 3

1. Introduction

This document describes the hardware of the XMP-6200.

1.1. Package contents

Media Player Unit

AC Adapter
(with select power plug)

Wi-Fi Antenna

HDMI Cable

Velcro (2 sets)

NOT INCLUDED: A USB mouse is required for system setup

1.2. Installation

Attach wireless antenna

Attach the wireless antenna as shown below, and then screw antenna clockwise onto the post.

Mounting Option 1: [VESA Mount] The player can be attached to mounting posts on the back of screens with the built in VESA MIS-D100 (100mmx100mm) compatible mounting flange(screw thread : **M4**)



Bottom view

Mounting Option 2: [Attach the player on the back of the monitor using Velcro]

1. Separate the Velcro pads, and stick on the bottom of player as shown below.

2. Stick the other Velcro pad onto the back of monitor, and then attach the player to it. Use HDMI cable to connect player and the monitor.

1.3. Physical view

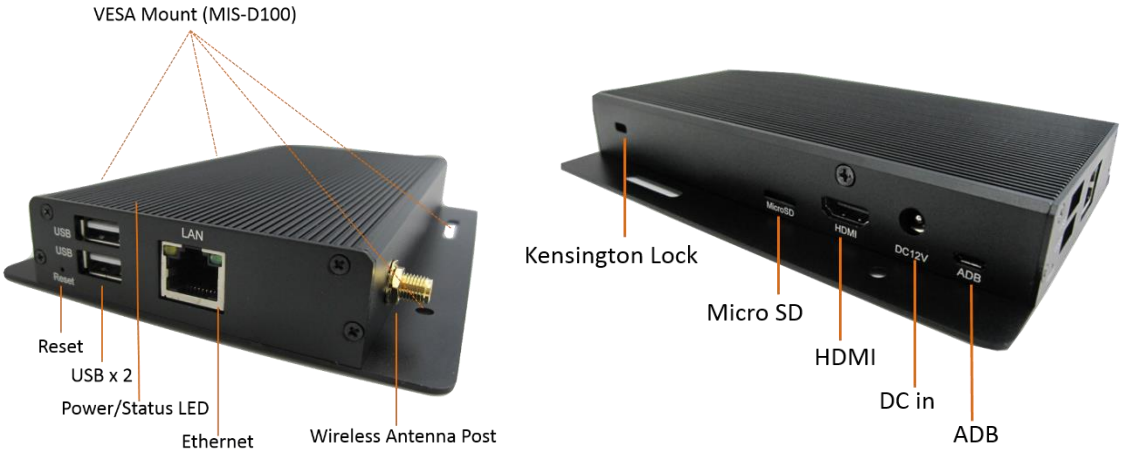



Physical features (left to right in above illustration)

- Reset button to perform factory reset
- USB ports for USB content update and configuration
- Power(green) and Status(orange) LED indicator
- HDMI 1.4 connector for digital video and audio combined output
- Ethernet port for network content update
- Wireless antenna post
- VESA mount
- Kensington lock
- Micro SD card slot
- HDMI port
- DC input port
- Micro USB for ADB , Android debug console port

2. Technical Data

2.1. Specifications

	XMP-6200
Video format support	POPAI Screen Media Standards S6 (MPEG-1 SIF, 3Mbps CBR) S7 (MPEG-1 480p, 10Mbps CBR) S8 (MPEG-1 720p, 15Mbps CBR) S9 (MPEG-2 480p, 6Mbps CBR) S10 (MPEG-2 720p, 12Mbps CBR) S11 (MPEG-4 AVC, 480p, 6Mbps CBR) S12 (MPEG-4 AVC, 720p, 10Mbps CBR) E4 (VC-1/WMV9, MP@ML, 720p) E7 (MPEG-4 ASP, 480p, 10Mbps CBR) E8 (MPEG-4 AVC, 1080p, 10Mbps CBR)
Image format support	POPAI Screen Media Standards S1 (JPEG 480p baseline) S2 (JPEG 720p baseline) S3 (JPEG 1080p baseline) E1 (PNG 24bpp+alpha, 480p) E2 (PNG 24bpp+alpha, 720p) E3 (PNG 24bpp+alpha, 1080p)
Audio codec support	POPAI Screen Media Standards S4 (MPEG L2 audio) S5 (MP3 audio, 320Kbps)
Dynamic content	W3C HTML5 (HTML, CSS, JavaScript) W3C SMIL 3.0 instructions (sub-set)
Physical I/O connectors	HDMI 1.4 USB 2.0 x 2 RJ45 ethernet port Wi-Fi antenna port Micro USB for ADB Micro SD card slot LED: Power(green)/Status(orange)
Local storage	8 GB on-board flash memory (up to 6 hrs of typical 720p video @ 3 Mbps) Micro SD card expansion slot
Accessories	AC adapter HDMI cable Wi-Fi antenna

	Velcro (2 sets)
Power requirement	12V 1.5A DC
Power consumption	6 W
Environmental	Operating temperature: 0 – 45° C / 32 – 113° F Humidity: 10 – 85% @ 40° C / 32 – 104° F non-condensing
Dimensions	167x118.8x24.5 mm (6.57x4.67x0.96 inches)
Weight	275 g 0.61 lbs
Safety	UL/FCC/CE/CCC/C-Tick/VCCI certified power supplies
Certifications	CE/FCC/VCCI/TELEC/CCC/IC
Warranty	One-year limited parts & labor